

ACE-713APM 130 W Medical Type ATX Power Supply with PFC

130W



Medical

PFC




Input Type	85 ~ 264VAC Full Range					
Output Voltage	+3.3V	+5V	+12V	-5V	-12V	+5Vsb
		10A (0.2A min)	6A		0.5A	0.5A
Efficiency	80%					
Temperature	Operating : -20 ~ 70°C (50 ~ 70°C derating curve) Storage : -40 ~ 75°C					
MTBF(hrs)	143,000					
Output Connector	5VSB & PS_ON cable					
Dimensions	152.4 x 89 x 39 mm					

Ordering Information

Part No.	Description
ACE-713APM-RS	130W AC-DC ATX Power Supply with PFC, meets medical standards

Dimensions

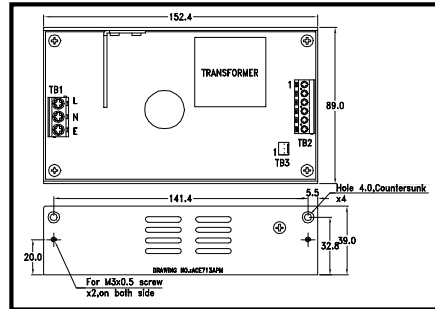

Optional 1 AC Input Solution



PN: CB-643EC-RS
20 cm AC input cable with I/O connector and fuse

Optional 2 Embedded Solution



PN: CB-709EB-RS
30 cm DC cable to backplane, with 20-pin ATX, HDD and SATA connectors

Optional 3 ATX Backplane Solution



PN: CB-709BP-RS
30 cm DC cable to backplane, with 20-pin ATX, HDD and SATA connectors

ACE-710APM 100 W Medical Type ATX Power Supply with PFC

100W



Medical

PFC




Input Type	85 ~ 264VAC Full Range					
Output Voltage	+3.3V	+5V	+12V	-5V	-12V	+5Vsb
		10A (0.2A min)	3.5A		0.3A	0.5A
Efficiency	80%					
Temperature	Operating : -20 ~ 70°C (50 ~ 70°C derating curve) Storage : -40 ~ 75°C					
MTBF(hrs)	100,000					
Output Connector	Optional Cable					
Dimensions	127 x 81 x 50 mm					

Ordering Information

Part No.	Description
ACE-710APM-RS	100W AC-DC ATX Power Supply with PFC, meets medical standards

Dimensions

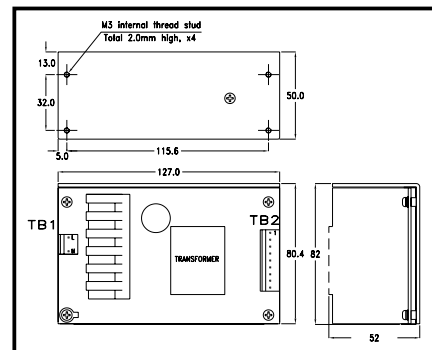

Optional 1 AC Input Solution



PN: CB-870EC-RS
20 cm AC input cable with I/O connector and fuse

Optional 2 Embedded Solution



PN: CB-710EB-RS
30 cm DC cable to CPU card, with 4-pin 12 V CPU, HDD and SATA connectors

Optional 3 ATX Backplane Solution



PN: CB-710BP-RS
30 cm DC cable to backplane, with 20-pin ATX, HDD and SATA connectors