
Industrial motherboard



P/N: 32600-004800-RS

- I. IEI AMD GX/LX Solutions
- 1. 1.25 pitch 20-pin connector for 18-bit LVDS nanel.
- 2. Connecting to IEI series SBC 20-pin LVDS LCD connector
- 3. 300 mm length

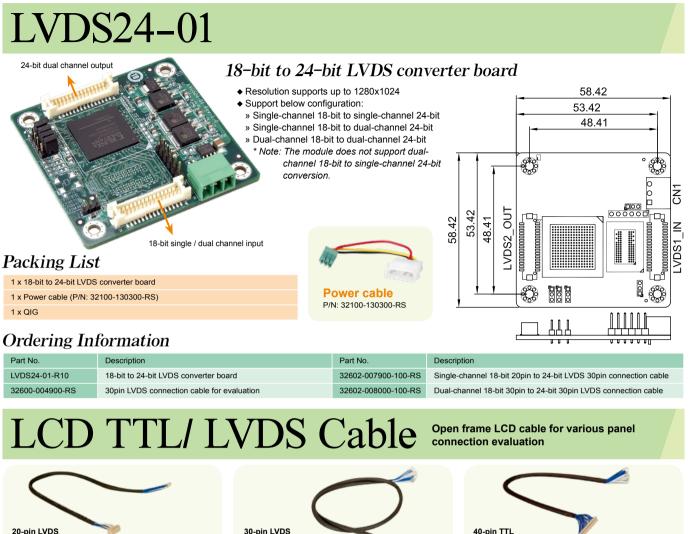

II. IEI SiS 661 ; Intel® 852/915/945 ; VIA MARK/LUKE Solutions

- 1. 1.25 pitch 30-pin connector for dual-channel 18/24-bit LVDS panel
- 2. Connecting to IEI series SBC 30-pin LVDS LCD connector
- 3. 600 mm length



III. IEI AMD GX/LX ; VIA MARK/

- LUKE 1. 1.25 pitch 40-pin connector for 18/24-bit TFT
- LCD panel
- 2. Connecting to IEI series SBC 40-pin TFT LCD connector
- 3. 300 mm length

PCIe x16 SDVO Interface VGA/ DVI Graphic Card

IEI only Intel[®] dual display solution by PCIe x16 interface SDVO add-on card



SDVO-100DVI-R10

Ordering Information

Part No.	Description
SDVO-100DVI-R10	DVI output, PCIe x16 add-on card by SDVO interface, Max. resolution 1600x1200
SDVO-100VGA-R10	VGA output, PCIe x16, add-on card by SDVO interface, Max. resolution 1600x1200
32100-154400-RS	SDVO I ² C bus wire cable (Connector pitch 2.0mm to 2.0mm) (SBC to PE & PXE series backplane only)
32100-154401-RS	SDVO I ² C bus wire cable (Connector pitch 2.54mm to 2.0mm) (SBC to PE & PXE series backplane only)





The most cost effective dual display solution for IEI boards with customized BIOS.

FI SDVO Cards Support List Model

PCIMG 1.3 Board	Model
Embedded Board	Model

PCIE-G41A2, PCIE-Q350, PCIE-9652 IMBA-G410, IMBA-G412ISA, IMBA-Q454, IMBA-XQ354, IMBA-9454G, IMBA-9454ISA, IMBA-9454B, IMB-G41A, IMB-Q354, IMB-9454G, KINO-G410